

Contents:**GROUP 4 - 4.1 - Elektra LED Lighting Range****4.2 - Elektra Lighting Section****4.3 - Battery Light Section**

> Elektra LED Lighting Range





LD 7002
Mounted LED Light

- 240V 50/60Hz 3.5W
- 78 light emitting diodes
- transparent plastic housing
- 2000mm lead with mini male plug
- screw installation
- protection class II

Available light colours:
cool white 4.000K

E529 787 01

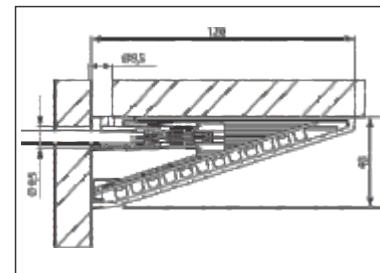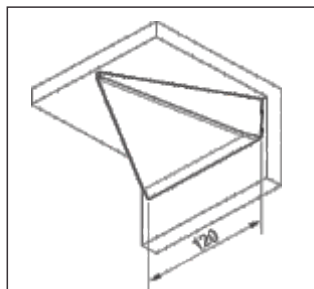

LD 7002
Mounted LED Light


- 240V 50/60Hz 3.5W
- 78 light emitting diodes
- transparent plastic housing
- 2000mm lead with plug
- 7-way distributor block
- Integrated main switch
- screw installation
- protection class II

Available light colours:
cool white 4.000K

E524 561 01



> Elektra LED Lighting Range

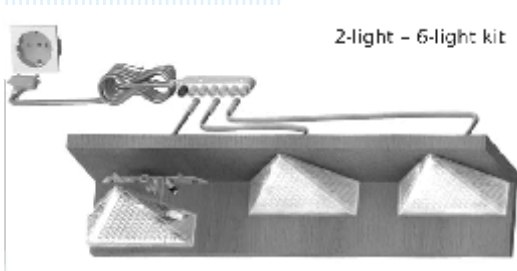

2-light - 6-light kit

Build your own light kit including integrated main switch.

- 2- to 6-light kit with main switch
- incl. 3000mm supply lead with Australian plug and 6-way terminal block (lights) + 1 coded outlet (main switch).

Just order 1 x E524 561 01 and 1, 2, 3, 4, or 5 x E529 787 01



LD 7003
Recess - Mounted Light


- 240V 50/60 Hz
- 2000mm lead with mini male plug
- push-fit installation
- protection class II

Available light colours:
cool white 4.000K




Group 4
4.1

AUSSIE CREATION MUSEUM potential looms as Craig Hawkins flies into HQ to discuss what can be done and to visit our Gympie Jurassic Ark site to both inspect repairs of recent flood damage and join the team as we erect the next Creation Mural (the first 5 days of creation) by artist Steve Cardno. See Mural click [HERE](#)

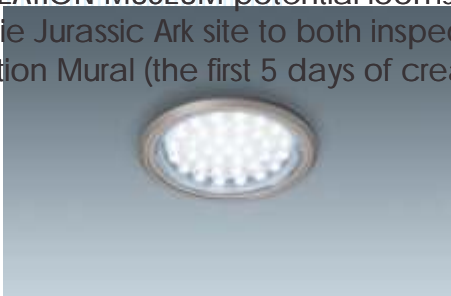

- 1,8W
- 35 diodes
- dim. of inst.: ø 58mm

E529 859 02 - Chrome
E529 859 22 - Satin Nickel

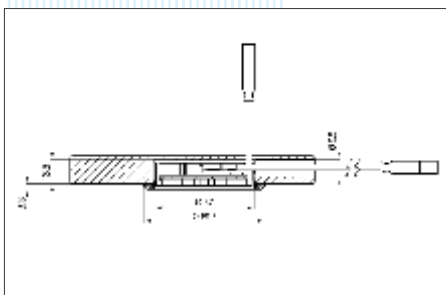


> Elektra LED Lighting Range



Fitted switch -55
240V 2.5A

- 2000mm lead with coded mini male plug for: supply lead/
- 6-way terminal block + 1 coded outlet (E531 414 08)
- screw-/push-fit installation


E531 588 01 - White

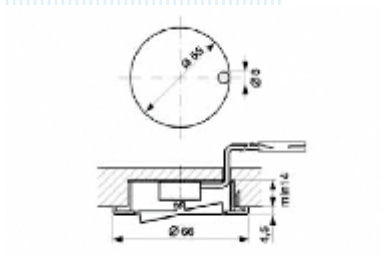

Door Switch
240V 2.5A

- Open when switch is activated
- 2000mm lead with coded mini male plug for supply lead/
- 6 - way terminal block + 1 coded outlet (E531 414 08)

E525 701 12 - White

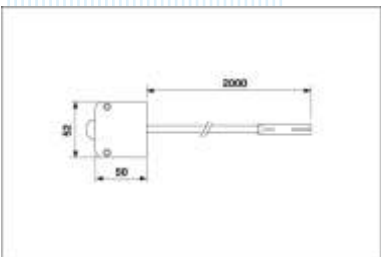

Supply lead/6-way terminal block
+ 1 coded outlet
240V 2.5A

- for connection of max. 6 lights/1 switch
- with Australian plug and 6-way terminal block and 1 coded outlet for switch
- 3000mm

E531 414 08 - White

> Elektra LED Lighting Range



Supply Lead
240V 2.5A

- for connection of one light
- with Australian plug and mini female socket
- 3000mm

E531 115 03 - White



Supply Lead/6-way terminal block
240V 2.5A

- for connection of max. 6 lights
- with Australian plug and 6-way terminal block
- 3000mm

E531 116 05 - White



Extension Lead
240V 2.5A

- with mini male plug and mini female socket
- 2000mm

E531 111 01 - White



Y-Distributor
240V 2.5A

- 1 red outlet for switch
- 1 white outlet
- L51/W21/ H 10mm

E529 753 01



Strip Lighting Pure White 5mtr with 3M
double sided tape

E3528-4800



Connector for Strip Light

E3528-CON



Power Plug for Strip Light 0.5A
E3528-12V-0.5

Power Plug for Strip Light 2.0A
E3528-12V-2.0

The recessed lights below show the various colours available. Original colours may vary from the photo due to the printing process.

Colour	Code
white	01
polished chrome	02
black	04
brass	09
satin nickel	22
satin chrome	33




Radiation angle	Halogen bulb	Halogen lamp	Minimal distance to inflammable material	Drill hole for installation
Dimensions of installation	Tube diameter			



ECO light 12V/10W
 - opal glass diffuser
 - 2000mm lead with plug
 - push-fit installation

- E561 054 01 white
- E561 054 02 polished chrome
- E561 054 04 black
- E561 054 22 satin nickel


Dimensions of installation
 Ø 55mm
 D 16mm

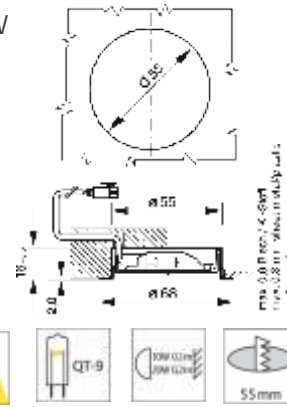

ECO light 12V/20W
 - clear glass diffuser
 - 2000mm lead with plug
 - push-fit installation

- E561 014 01 white
- E561 014 02 polished chrome
- E561 014 04 black
- E561 014 22 satin nickel


Dimensions of installation
 Ø 55mm
 D 16mm

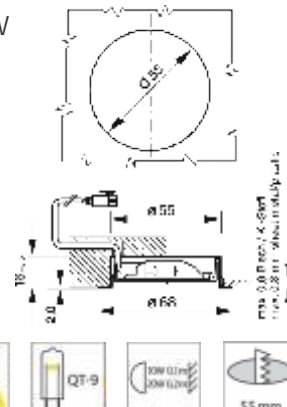

Light housing triangle S/steel
 - decorative element: stainless steel
 - screw installation

- E531 199 01 stainless steel

Dimensions of installation
 L 122mm
 W 130mm
 H 40mm

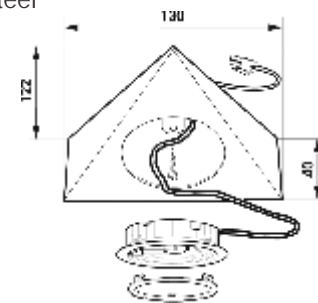


Suitable with ECO lights




Light housing rectangle S/steel
 - decorative element: stainless steel
 - screw installation

- E531 209 22 stainless steel

Dimensions of installation
 L 147mm
 W 82mm
 H 77mm

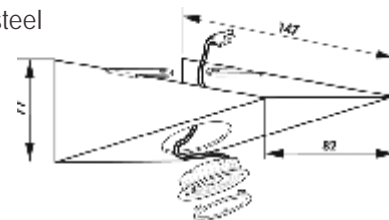

Suitable with ECO lights

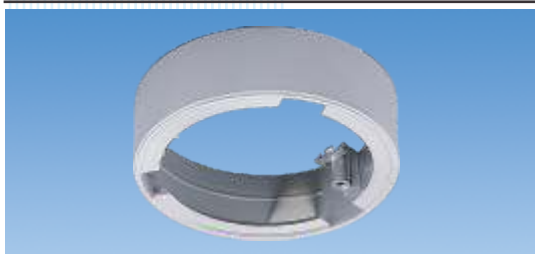


Surface ring
 - height of cover ring 22 mm
 - Ø 68 mm

- E525 820 02 polished chrome
- E525 820 22 satin nickel


Suitable with ECO lights



Cornice light 12V/20W
 - tube \varnothing 8 mm
 - dichroic reflector bulb
 - light head 180° rotatable
 - 90° swivelling
 - 200 mm connecting lead with plug
 - screw installation

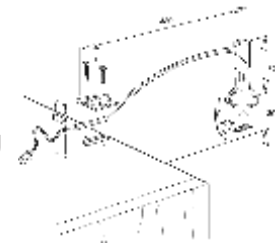

E523 335 02 polished chrome
 E523 335 22 satin nickel



5 way terminal block
 - for connection of max. 6 lights
 - 155 mm lead

E522 090 02 white



Micro switch
 - open when switch is activated

E513 307 02 white




Possum transformer
 240V/12V/35-60VA

ETED-60A

Possum transformer
 240V/12V/35-105VA


ETED-105A

- more powerful
 - leading edge technology

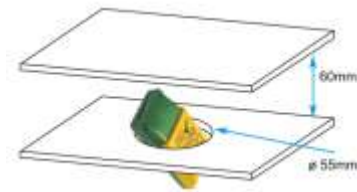



- Surface mounted light 230V 50/60Hz 8W
- 2 integrated electronic ballast
 - switch
 - prismatic cover
 - max. 10 lights can be connected in a row
 - light colour: cool white
 - protection class II
 - connector system C7/C8

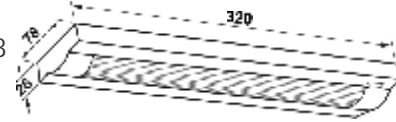


- E526 020 01 white
E526 020 63 aluminium look

Dimensions of installation
8W L 320; W 78; H 26mm

Lead to suit	
E520 950 01	no plug
E521 329 01	with plug



- Recess-mounted light 13W
230V 50/60Hz
- for panels from 16 mm thickness
 - integrated electronic ballast
 - max. 10 lights in a row
 - connector system

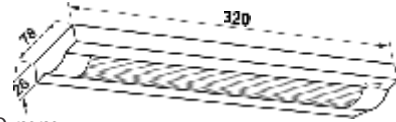


- E532 060 25 white

Dimensions of installation
13W - L 578; W 78; H 10 mm

Lead to suit	
E520 950 01	no plug
E521 329 01	with plug



- Surface mounted light 230V
- 2 integrated electronic ballast
 - switch
 - prismatic cover
 - max. 10 lights can be connected in a row
 - light colour: cool white
 - protection class II
 - connector system C7/C8

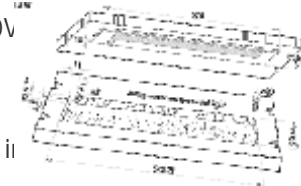

- E526 050 01 white
E526 050 63 aluminium look

Dimensions of installation
13W - L 320; W 78; H 26mm


Lead to suit	
E520 950 01	no plug
E521 329 01	with plug



- Lighted glass-shelf box 230V 50/60Hz 13W
- anodised aluminium profile with frosted glass shelves
 - upward and downward light effect
 - switch
 - integrated electronic ballast
 - easy level adjustment by means of hand nuts
 - supply lead with mini connector system
 - protection class II
 - max. load 10kg

E531 755 01 stainless steel look
E531 755 66 aluminium


Dimensions of installation
13W L 900; W 202; H 50mm

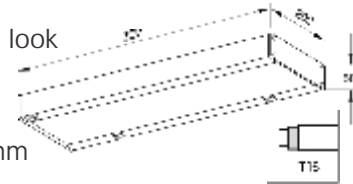

- Lighted glass-shelf box 230V 50/60Hz 13W
- anodised aluminium profile with frosted glass shelves
 - upward and downward light effect
 - switch
 - integrated electronic ballast
 - easy level adjustment by means of hand nuts
 - supply lead with mini connector system
 - protection class II
 - max. load 10kg


E531 728 01 stainless steel look
E531 728 66 aluminium

Dimensions of installation
13W L 600; W 202; H 50mm

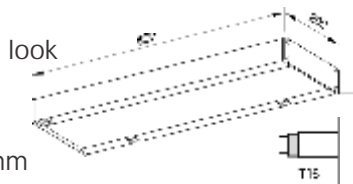


Group 4
4.2

LD 6000 LB Series

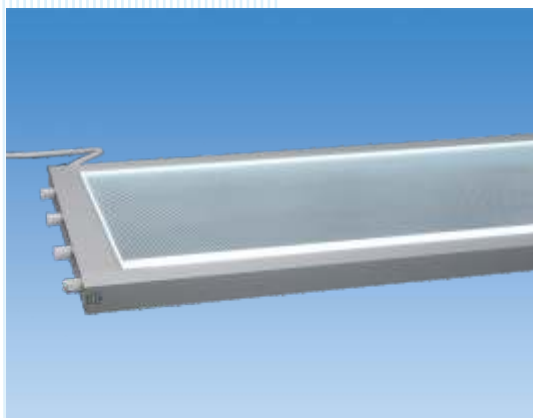

- Recessed light shelf 230V 50/60Hz
- dotted white glass
 - fluorescent tube T2/T7 \varnothing 7 mm, 4000° K
 - integrated electronic ballast
 - 16 mm profile
 - for 16 to 19 mm side panels, width/depth customised
 - approx. 300 mm supply lead with mini plug

E529 218 70 567x284/13W
E529 218 71 767x284/13W
E529 218 72 867x284/19W

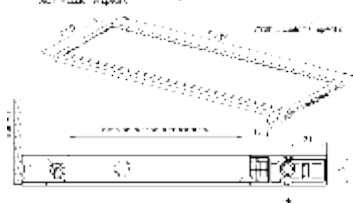

>Accessories




Fluorescent tube 6W
Light Disc Opal
230V/50-60Hz
- GX 53 base

E533442 51 light colour
- W840 cool white



LED lamp 2, 7W
Light Disc LED
230V/50-60Hz
- GX 53 base

E529290 01 white
- 6400°K



Halogen bulb
QT 9
- G4 base

E540094 36 12V/10W
E540094 33 12V/20W



> Battery Light Section



Cabinet Light. With Micro Switch.

- AAA Batteries Included
- Battery Life 25-28 Hrs
- Life of Light 100,000hrs

E707504



Wireless Drawer Light MOVEMENT Activated

- AAA Batteries Included
- Battery Life 8-10 Hrs

E718506



Wireless Door Light MOVEMENT Activated

- AAA Batteries Included
- Battery Life 8-10 Hrs

E718510